

www.The Floor Heating Warehouse.co.uk

Dual Board Overlay System

- Complete Solution for Carpet & Vinyl Floors
- Dry Lay Alternative
- Clean & Simple to Install
- Suitable for use over EcofilmSet system



System Application

Ecomax-Duo Dual Board Overlay System is designed as the complete solution for carpet and vinyl floors. It is applied over the **Ecofilm** to create a free floating sub-floor that is extremely stable and is instantly ready to receive the finished floor covering.

Further Information

The complete electric underfloor heating solution for carpet and vinyl floors.

Traditional methods of installing electric underfloor heating in rooms with carpet or vinyl floor coverings, consisted of utilising cable systems covered with difficult to use and time consuming liquid levelling compounds. These tend to be messy & extend the installation time & costs because of drying/curing times.


There is now a dry lay alternative to this system that is both quick, clean and simple.

Ecomax-Duo is a dual board overlay system suitable for use over Ecofilm underfloor heating. It is a dry lay system that creates a free floating sub-floor that is extremely stable and is instantly ready to receive the finished floor covering.

Ecomax-Duo provides a smooth stable laying surface to which most finished floor coverings can be fixed. This enables Ecofilm elements to be used as the underfloor heat source for a variety of floor coverings such as carpet, linoleum and luxury vinyl.

Installation

Installation of **Ecomax-Duo** is quick, clean and simple. The system consists of a baseboard and a top board, each with a layer of adhesive. To install, place both boards with the facing adhesive layers on top of each other. The joint edges of each layer should be staggered (see diagram). Both adhesive surfaces interact to bond the boards together to provide a stable laying surface. Boards can be easily worked with and cut. Full inter-board adhesion is obtained by tapping with a rubber mallet once a satisfactory layout pattern has been achieved.

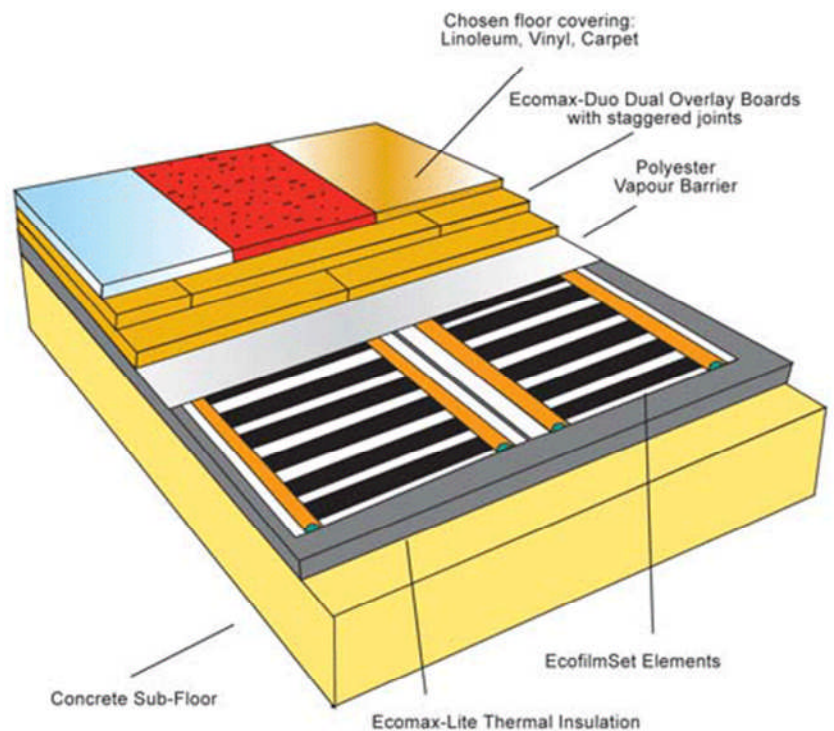

The combination of Ecofilm and Ecomax-Duo provides a labour saving, cost effective method for heating Linoleum, Vinyl and Carpet. Completely dry-fit, the heating system and floor can be laid in one continuous process.

No mess and no drying time delay means jobs can be completed quicker and easier. Carpet, Vinyl & Linoleum can be laid directly on the surface of EcoLay as the thermal insulation material (Ecomax-Lite) used below the Ecofilm heating system provides cushioning from step impact.

Dimensions	600mm x 1200mm
Thickness	7mm
Coverage per pack	2.88m ² (4 base boards & 4 top boards)
Material	MDF fitted with interactive adhesive
Density	770Kg/m ³
Fire Class	B2
Thermal Resistance	0.07m ² K/W

Product Code	Thickness (mm)	Dimensions (mm)	Pack Contents
DUO 7	7mm	600 x 1200	4 base boards & 4 top boards (2.88m ²)